



# Magellan RoadMate 1440 Back Cover

## Disassembly

How to remove the back cover of the GPS for replacement or prior to other guides.

Written By: Benton Burns



## INTRODUCTION

The back cover needs removed before any other guide is executed.

---



### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Magellan RoadMate 1440 Back Cover Disassembly



- Place the GPS with the screen facing down.

## Step 2



- Locate the four screws in the back cover of the device. Use a Phillips #0 screwdriver to remove all four 4.2mm Phillips #0 screws.



## Step 3




- Locate the screws at the bottom of the device. Use a Phillips #0 screwdriver to remove the two 4.2mm Phillips #0 screws.

## Step 4



- Insert the black spudger into the crease in the side of the GPS.
- Move the end of the spudger down to break the seal between the two plastic shells.
- Continue doing this along each side of the GPS to ensure a smooth removal.

## Step 5

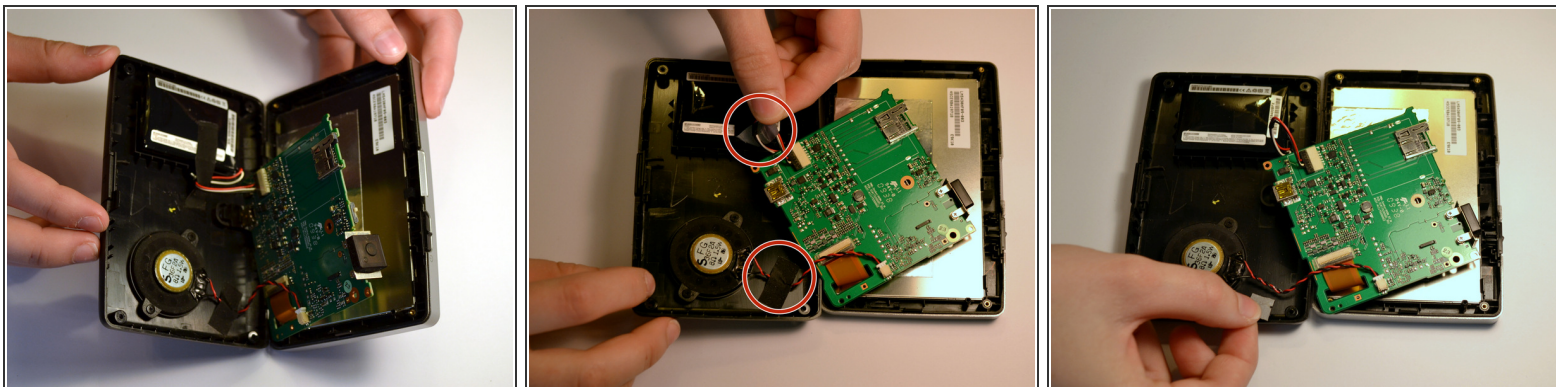

- Fully separate the two sides of the case.
- Locate the tape on the battery wires and the tape on the speaker wires. Remove both pieces of tape.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 01:42:35 AM.